




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/30</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/18744</b> (43) International Publication Date: 15 April 1999 (15.04.99)
(21) International Application Number: PCT/SE98/01805 (22) International Filing Date: 6 October 1998 (06.10.98) (30) Priority Data: 08/946,244        7 October 1997 (07.10.97)        US 6400966 (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: ANDERSSON, Rutger; Oslogatan 36, S-164 31 Kista (SE). TEDER, Paul; Palissadgränd 24, S-187 46 Täby (SE). KARLSSON, Torbjörn; Svingelvägen 4, S-437 42 Lindome (SE). (74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>	

(54) Title: BASE STATION ARCHITECTURE FOR A MOBILE COMMUNICATIONS SYSTEM

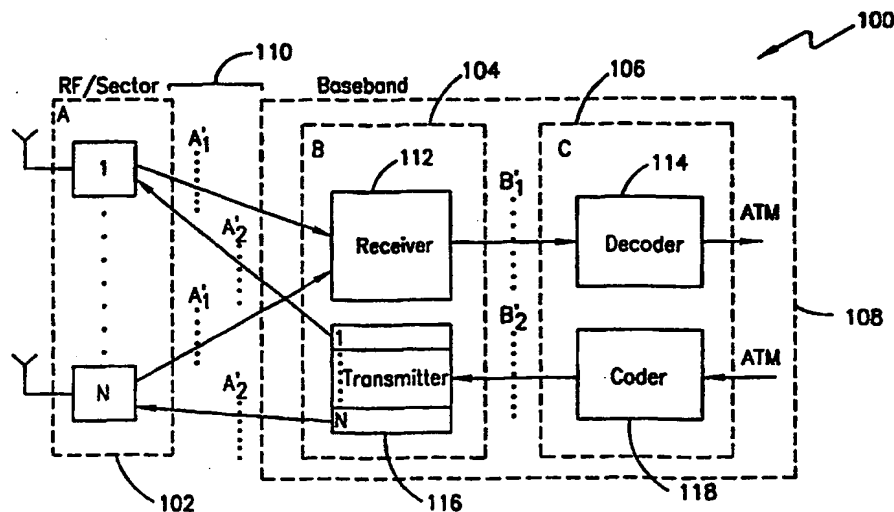

## (57) Abstract

A base transceiver station (100) for a mobile communications system is disclosed, which is divided into a plurality of functional units (102, 104, 106) that enables the signal processing resources to be flexibly allocated and cost-effectively implemented in hardware. A flexible communications interface is created between the base transceiver station units (102, 104, 106) which allows the signal processing resources within the units to be used more efficiently. Essentially, the base transceiver station (100) hardware is dimensioned to statistically distribute the signal processing resources among the different radio transmission services available. Consequently, the allocated base transceiver station hardware can be used more efficiently, which minimizes the overall size and weight of the base station.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

-1-

## BASE STATION ARCHITECTURE FOR A MOBILE COMMUNICATIONS SYSTEM

### BACKGROUND OF THE INVENTION

#### 5        Technical Field of the Invention

The present invention relates in general to the mobile communications field and, in particular, to a base station architecture for a new generation of mobile communications systems.

#### 10        Description of Related Art

The architecture used for any conventional mobile communications base station (BS) is a channel-based structure. FIGURE 1 is a block diagram of such a conventional channel-based mobile communications BS 10. Essentially, as illustrated in FIGURE 1, BS 10 allocates one of the fixed channel resources 12a(Ch.1-M1)-12N(Ch.2-M2) for each call. The baseband section of each channel is used to handle  
15 all of the possible radio transmission services available for a call, and the radio frequency (RF) section of each channel includes all of the RF resources needed for the call. Each BS sector (1-N) includes the maximum number of channel resources that will be needed for that sector over a period of time. Each sector's channel resources are combined for transmission and reception via a respective antenna subsystem (1-N).

20 A significant problem with the conventional channel-based structure described above is that it is limited to systems that provide relatively few different radio transmission services and the processing requirements for those different radio transmission services are virtually the same. However, in the rapidly expanding telecommunications field, numerous multimedia communication scenarios are being  
25 developed with a large number of different radio transmission services, with each such service having substantially different processing requirements. Consequently, from a purely statistical standpoint, there is a growing need for communications network operators to be able to provide all of the different radio transmission services for different users, and the appropriate capacity that will be needed for the different  
30 sectors involved.

For a conventional channel-based BS operating in a multimedia scenario with

-2-

a fixed amount of resources allocated for each channel and sector, each BS channel will have to be equipped with the resources needed for the radio transmission service that imposes the highest requirement on that channel's processing capability. Also, in a multimedia scenario, each conventional BS sector will have to be equipped with the maximum resources that will be needed over time. Consequently, in the future, conventional channel-based BS hardware will be unrealistically dimensioned and thus provide a maximum processing capability that will far exceed what can be adequately supported by any future radio air interface. Therefore, for most of a conventional BS's operating time, a large portion of the BS's hardware will be unnecessarily allocated but unused, which will significantly and unnecessarily increase the overall size and weight of the BS.

The air interface to be used for a so-called "Third Generation" mobile communications system, such as, for example, a Wideband Code Division Multiple Access (W-CDMA) system, imposes a whole new set of requirements for a BS architecture compared to those set forth in previous standards. See, for W-CDMA, the "Report on FPLMTS Radio Transmission Technology Special Group (Round 2 Activity Report)," Version E 1.2, January 1997, Association of Radio Industries and Businesses (ARIB), FPLMTS Study Committee, JAPAN. Essentially, the Base Transceiver Station (BTS) for a third generation mobile communications system will have to be capable of handling such different end user services as voice, circuit-switched data, and packet-switched data. Also, the BTS will have to be capable of supporting a number of different user data rates. For example, a third generation BTS will have to support voice signals at an 8 kbps rate, circuit-switched data from 64 kbps to 384 kbps, and packet-switched data from approximately 1 kbps to 160 kbps.

Furthermore, for a third generation BTS, separate protocols (encoding schemes) will be used to map users to a number of physical channels characterized by a symbol rate. An optimized encoding scheme will be used for each of the channels for maximum efficiency. A description of these protocols can be found in available documentation for W-CDMA. Thus, in a W-CDMA system, the same BTS should be capable of supporting different physical channels with a range of symbol rates between 16 ksps to 1024 ksps, and also be capable of handling multiple spreading rates. In fact, in order for the BTS to be capable of supporting very high user data rates, it also

-3-

may have to support a number of chip rates. A third generation BTS will also have to be capable of supporting such a network function as "softer" handover (a handover where diversity is gained from two or more sectors corresponding to one BTS).

#### SUMMARY OF THE INVENTION

5 A BTS structured in accordance with the present invention is divided into a plurality of functional units which enables the signal processing resources to be flexibly allocated and cost-effectively implemented in hardware. Flexible communications interfaces are created between the BTS units which allows the signal processing resources within the units to be used more efficiently. Essentially, the BTS  
10 hardware is dimensioned to statistically distribute the signal processing resources among the different radio transmission services available. Consequently, the allocated BTS hardware can be used more efficiently, which minimizes the overall size and weight of the base station.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15 A more complete understanding of the method and apparatus of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 is a block diagram of a conventional channel-based mobile communications base transceiver station;

20 FIGURE 2 is a simplified schematic block diagram of a base transceiver station for a mobile communications system, which is structured in accordance with a preferred embodiment of the present invention;

FIGURE 3 is a block diagram that illustrates exemplary hardware that can be used to implement the functions of BTS 100 shown in FIGURE 2;

25 FIGURES 4A and 4B are diagrams that illustrate the flexible allocation of signal processing resources utilizing the interface A<sub>1</sub> shown in FIGURE 2, in accordance with the preferred embodiment of the present invention;

FIGURE 5 is a detailed block diagram of an RF/sector resource RX sub-unit shown in FIGURE 3;

30 FIGURE 6 is a detailed block diagram of a hardware BBRX sub-unit shown

-4-

in FIGURE 3;

FIGUREs 7A and 7B are diagrams that illustrate the flexible allocation of signal processing resources utilizing the interface B<sub>1</sub> shown in FIGURE 2, in accordance with the preferred embodiment of the present invention;

5       FIGURE 8 is a detailed block diagram of a DEC resource shown in FIGURE 3;

FIGUREs 9A and 9B are diagrams that illustrate the flexible allocation of signal processing resources utilizing the interfaces B<sub>2</sub> and A<sub>2</sub> shown in FIGURE 2, in accordance with the preferred embodiment of the present invention;

10       FIGURE 10 is a detailed block diagram of an ENC resource shown in FIGURE 3;

FIGURE 11 is a detailed block diagram of a BBTX resource shown in FIGURE 3; and

15       FIGURE 12 is a detailed block diagram of an RF/sector resource TX shown in FIGURE 3.

#### DETAILED DESCRIPTION OF THE DRAWINGS

The preferred embodiment of the present invention and its advantages are best understood by referring to FIGUREs 1-12 of the drawings, like numerals being used for like and corresponding parts of the various drawings.

20       FIGURE 2 is a simplified schematic block diagram of a BTS for a mobile communications system, which is structured in accordance with a preferred embodiment of the present invention. The exemplary BTS shown for the embodiment in FIGURE 2 is for a W-CDMA system. However, the present invention is not intended to be so limited and can be implemented for any type of mobile communications system in which functional flexibility in allocating communications resources is advantageous. Referring to FIGURE 2, the BTS 100 shown is divided into three major functional units: RF/sector unit A (102); receiver-transmitter unit B (104); and coder-decoder unit C (106). Units B and C are functions included in the baseband section 108 of the BTS 100.

30       RF/sector functional unit A (102) includes all of the resources needed to convert modulation information from an RF signal to a baseband signal and vice versa.

-5-

This RF-baseband conversion function of unit A is further divided into functional sub-units 1 to N. Each functional sub-unit 1 to N includes the RF-baseband conversion resources needed for one associated sector. In contrast with conventional systems, these conversion resources allotted for each sector are not associated with individual calls. These conversion resources allotted for each sector 1 to N are preferably dimensioned in terms of output power, bandwidth, number of diversity antennas, and the number of carriers to be conveyed within each sector. For example, from a functional and associated hardware standpoint, each sector sub-unit 1 to N can include a multi-carrier power amplifier (MCPA). As described in more detail below, this novel approach of concentrating the RF conversion resources for BTS 100 in functional sectors affords substantial savings in BTS hardware size and weight in comparison with the conventional base stations that distribute those resources on each physical channel.

The functions provided by receiver-transmitter functional unit B (104) and code-decoder functional unit C (106) operate at baseband, and include all of the resources needed for individual call setups, wherein each call can impose a different demand on the data rate for radio transmission services. As such, all of the communications resources in functional units B and C can be used for any of the radio transmission services provided.

BTS 100 includes a novel connection interface A' (110) between RF/sector functional unit A (102) and receiver-transmitter functional unit B (104). Interface A' (110) enables any of the communications resources included within functional units B (104) and C (106) (e.g., allocated for a specific radio transmission service) to be allocated to any of the sectors 1 to N. Consequently, the baseband hardware associated with functional units B (104) and C (106) can be dimensioned to handle the maximum load of the overall BTS, instead of the maximum load of each sector.

In order to enhance the flexible allocation of resources and thereby significantly reduce the size of the hardware in BTS 100, the baseband section's (108) functional units B (104) and C (106) include the capability to freely allocate the baseband resources in accordance with the needs of the radio transmission service capabilities required for a specific call. The baseband section's (108) functional units also include the capability of freely allocating the baseband resources for uplink and

-6-

downlink processing of asymmetrical radio transmission services.

As shown in FIGURE 2, the baseband section (108) includes four functional units: a receiver unit 112 and decoder unit 114 for uplink traffic; and a transmitter unit 116 and coder unit 118 for downlink traffic. Preferably, the hardware associated with the baseband section 108 can be allocated between those four functions on a call by call basis. Alternatively, this hardware can be reallocated on a recurring basis (e.g., once every 24 hours) in order to better follow the fluctuations of the service mix.

Specifically, for the uplink signals, the receiver unit 112 functions to separate the modulation information from the RF/sector unit 102 into user specific channels, by multiplying the input signal from RF/sector unit 102 by user specific short and long codes. At the same time, the receiver unit 112 functions to demodulate the input signal and detects the data from the resulting signal. The decoder unit 114 deinterleaves the input data and performs channel decoding. Using an Asynchronous Transfer Mode (ATM) protocol, the output signal from decoder unit 114 is coupled via a transmission line interface to an output for further processing and/or display.

For the downlink signals, using an ATM protocol, input data is coupled via a transmission line interface from an input to the coder unit 118, where the data is channel coded and interleaved. The coded data is coupled to the transmitter unit 116 and multiplied with a user-specific short code, which can be different for each sector/frequency. At the same time, the transmitter unit defines the modulation to be used. Also, as described below, the user-specific spreaded data from different users are added sectorwise, and thereafter multiplied with a sector/frequency-specific long code.

As described earlier, the baseband section 108 is divided into two functional units B (104) and C (106), which eases the implementation of more flexible resource allocation hardware. One important reason for dividing the baseband section 108 as shown in FIGURE 2 is that the two functional units B and C have quite different functional structures and implementation technologies. For example, the transmitter unit 116 and receiver unit 112 operate with chip rates in the range of the RF bandwidth for the BTS. The processing hardware to implement such functional capabilities is preferably field-programmable gate arrays (FPGAs) or Application Specific Integrated Circuits (ASICs), rather than digital signal processors (DSPs). On the other hand, the



-7-

processing in the coder unit 118 and decoder unit 114 is accomplished at a symbol rate, or at about a 10-100 times lower rate than the transmitter/receiver units. This lower rate processing in the coder/decoder allows a designer to more freely choose an implementation technology. Notably, considering the opportunity to integrate the associated hardware on a step-wise basis, it is advantageous to separate the functional units in block B (104) from those in block C (106).

Another important reason for dividing the baseband section 108 as shown is that the functional units in blocks B (104) and C (106) have different pooling potentials. For example, the transmitter unit 116 in block B includes channel resources whose processing requirements are independent of the data rate of the radio transmission services being processed. The processing requirements of the receiver unit 112 in block B are also independent of the radio transmission services' data rates, but in this case, at higher data rates, the processing requirements of the receiver unit 112 can be scalable to the data rate of a particular radio transmission service involved.

On the other hand, the coder unit 118 and decoder unit 114 in block C includes channel resources whose processing requirements are fully scalable to the data rate of the radio transmission service involved. Therefore, in this case, the scalability of the functional units in block C (106) is facilitated by separating the functions of block C from those in block B (104).

Additionally, many of the multimedia radio transmission services being provided have asymmetrical characteristics with respect to the others, and these different characteristics can vary over time. In such an environment, the transmitter and receiver resources in functional block B (104) and the coder and decoder resources in functional block C (106) can be more flexibly and efficiently utilized in processing these asymmetrical services, because these resources can be freely allocated for uplink or downlink processing, either on a per call or recurring (e.g., 24 hour) basis.

However, as illustrated by the exemplary embodiment shown in FIGURE 2, the resources utilized for uplink and downlink signal processing are allocated to different physical (hardware) units in blocks B (104) and C (106). Since the exemplary BTS shown in FIGURE 2 is for a W-CDMA system, the resources needed for downlink signal processing can be 5-10 times smaller and less complex than the resources needed for uplink signal processing. Consequently, separating the uplink

-8-

and downlink signal processing functions in the BTS 100 shown in FIGURE 2 does not affect to a significant degree its uplink and downlink resource allocation flexibility, but instead advantageously facilitates the step-wise hardware integration of each functional unit shown.

5           Notably, a novel aspect of the BTS 100 shown in FIGURE 2, which is a BTS architecture that can be implemented for a W-CDMA system (but can also be applied to a BTS for a CDMA system), because of the transmitter unit's (116) relatively low complexity, the transmitter hardware that can be utilized has a small impact on the overall size of the BTS. Consequently, the transmitter unit's (116) individual  
10           hardware resources can be allocated for each sector/frequency, up to the maximum capacity that can be handled in accordance with the W-CDMA air interface specification.

          For "softer" handovers, the same data can be transmitted in a plurality of the N possible sectors. This data in different sectors can be spread by different short codes  
15           (and a sector-specific long code), which advantageously allows pooling of the spreading hardware resources by sectors in BTS 100. Consequently, by being able to sector pool the transmitter's (116) hardware resources, the data rate of the interface A', (described in detail below) can be significantly reduced in comparison with conventional approaches that utilize a pool of spreaders for the whole BTS.

20           In accordance with the preferred embodiment of the present invention, the capability of flexibly allocating processing resources in BTS 100 can be provided as follows. Each channel resource allocated for uplink signal processing in the receiver unit 112 can simultaneously receive signals from different sectors (1 to N) of the RF/sector unit 102. Consequently, the receiver unit 112 can dynamically select which  
25           input signals to process at any one point in time. This capability allows flexible capacity for each sector at call setup. For "softer" handovers during a call, this capability gives significant savings in hardware volume. In other words, the same receiver resources can be used during the whole "softer" handover operation. As such, during "softer" handovers or similar operations, the BTS 100 is not required to  
30           reallocate or double allocate the receiver's signal processing resources.

          Specifically, the communications interface A', between the RF/sector section 102 and the receiver unit 112 provides a significant portion of the resource allocation

-9-

flexibility for BTS 100. The interface A', comprises a separate high speed serial connection from each RF/sector resource in section 102 to the common receiver unit 112. The serial connections are made through interfaces transferred to a high speed parallel bus, which carries all of the incoming sector information to the receiver unit 112.

The signal processing resources in the decoder unit 114 can be freely allocated to any resource in the receiver unit 112. This resource allocation flexibility for the decoder is accomplished through the communications interface B', which comprises a number of moderately-high speed time-slotted serial buses connected between the receiver unit 112 and the decoder unit 114. Each signal processing resource in the receiver unit 112 can place data on a specific time-slot on one of the buses, and the BS manager (e.g., an operating system not explicitly shown) directs a signal processing resource in the decoder unit just where to fetch the data from that slot on the bus.

The decoder unit 114 provides flexible allocation of hardware resources to different radio transmission services for different calls. In other words, a high speed data rate service can utilize the same decoder unit (114) resources that had been previously utilized for speech calls. For example, the same decoder unit (114) hardware can process 100 calls at 8 kbps (data rate) each, as 8 calls at 100 kbps each. This capability of pooling the decoder resources in BTS 100 significantly reduces the size of the decoder hardware that can be used.

For downlink signal processing, the signal processing resources in the coder unit 118 can be flexibly allocated to handle different radio transmission services in essentially the same way as they are handled in the decoder unit 114. Consequently, this capability of pooling the signal processing resources in the coder unit 118 significantly reduces the size of the coder hardware that can be used.

Specifically, by using the interface B', a user-specific signal processing resource in the coder unit 118 can be allocated to any sector in the transmitter unit 116, since the transmitter unit's resources are sector/frequency allocated. The communications interface B' between the coder unit 118 and transmitter unit 116 is a moderately-high speed time-slotted serial/parallel bus. Consequently, each signal processing resource in the coder unit 118 can place data on a specific time-slot on the bus, and the BS manager can direct a signal processing resource in the transmitter unit

-10-

116 just where to fetch the data from that slot on the bus.

In general, this downlink functional capability in the baseband section 108 of BTS 100 provides a significant amount of flexible capacity per sector. For "softer" handover functionality on the downlink, this capability facilitates the "softer" handover operation and saves substantial baseband hardware resources. The same coder unit signal processing resources can be mapped to the transmitter unit's resources simultaneously for an unlimited number of sectors (1 to N). Consequently, the BTS 100 shown in FIGURE 2 is not required to reallocate or double allocate the signal processing resources of the coder unit 118 during the complete "softer" handover (or other similar) operations.

The output of each sector-allocated signal processing resource in transmitter unit 116 is coupled via communications interface  $A'_2$  to a corresponding signal processing resource in the RF/sector section 102. The communications interface  $A'_2$  is preferably implemented by N point-to-point high speed serial interface connections.

In general, with the BTS 100 shown in FIGURE 2, in order to appropriately handle the processing of asymmetric radio transmission services, the uplink and downlink signal processing resources in BTS 100 can be allocated independently at call set up or during a call. In other words, the BTS 100 can flexibly increase or decrease the uplink and downlink signal processing resources being used during a call. For example, for processing high data rate radio transmission services, the BS manager can have BTS 100 allocate several parallel channel resources for the uplink and/or downlink to a call. For the downlink allocation, incoming user data to the coder unit 118 can be mapped to several of the coder unit's signal processing resources, and the output of each such resource can be mapped to a specific short code per sector/frequency in the transmitter unit 116.

A significant advantage of the BTS 100 shown in FIGURE 2 and described above in accordance with the present invention is that the architecture makes it possible to minimize the hardware size for a given radio transmission service mix. For example, if the dominant calls being processed are speech calls with low data rates, many receiver resources will be needed, but less decoding and coding resources will be needed. On the other hand, the opposite is true if the dominant calls being processed are data calls with high data rates, because many coding and decoding

-11-

resources will be needed, but less receiver resources will be needed. Consequently, the present invention makes it possible for an operator to optimally and cost-effectively outfit the BTS with the appropriate hardware resources, in accordance with a predicted radio transmission service mix.

5           The hardware size of the BTS 100 can also be optimized to process asymmetric traffic on the uplink and downlink. For example, if more downlink than uplink traffic is being processed by the BTS, then more signal processing resources in the coder unit 118 are needed, and less resources in the receiver unit 112 and decoder unit 114 are needed. Consequently, an operator can equip the BTS (100) with uplink and downlink  
10           signal processing resources based on a predicted future need.

          For the baseband section 108 of the BTS, a number of different factors can come into play when determining the maximum amount of signal processing resources that can be allocated to a specific function. For example, the number of channel resources in the receiver unit 112 is limited to N (number of sectors) times the number  
15           of speech channels per sector that can be supported by the air interface. The number of resources per sector in the transmitter unit 116 is limited by the number of orthogonal spreading codes used. The maximum number of resources in the decoder unit 114 is limited to N (number of sectors) times the number of resources needed within a sector for the maximum total data rate within a sector, scalable between the  
20           radio transmission services.

          The number of resources in the coder unit 118 is limited similar to the limitations for the decoder unit 114 described above. However, the potential maximum data rate for the coder unit 118 is higher than that for the decoder unit, because of the orthogonality of the downlink signals.

25           FIGURE 3 is a block diagram that illustrates exemplary hardware that can be used to implement the functions of BTS 100 shown in FIGURE 2. A BTS 200 includes RF/sector unit 202 and baseband section 208. For this embodiment, RF/sector unit 202 shown in FIGURE 3 is one sub-unit out of a possible N sub-units within RF/sector functional unit A (102) shown in FIGURE 2. In other words, the  
30           signal processing resources in RF/sector unit 202 are the hardware resources for one sector. For the exemplary embodiment shown in FIGURE 3, these sector hardware resources include a transmitter MCPA 220, a receiver low noise amplifier (LNA) 222,

-12-

a transceiver RF part 224, and a transceiver digital part 226.

The hardware resources for the baseband unit 208 include one of the plurality of baseband transmitter sub-units BBTX in the transmitter unit 216, and one of the plurality of baseband receiver sub-units BBRX in the receiver unit 212. The sub-unit  
5 BBTX includes all of the transmitter resources for a sector (1 to N) for all carrier frequencies within that sector. The receiver unit 212 also includes one of the plurality of baseband random access sub-units BBRA, and one of the plurality of baseband interface sub-units BBIF. The BBRA sub-unit controls the uplink accesses for the BTS's control channel. The BBIF sub-unit forms part of interface A'. These  
10 baseband receiver and transmitter sub-units in hardware unit 204 correspond to the functional receiver and transmitter units of unit 104 in FIGURE 2.

The baseband hardware unit 208 also includes one of a plurality of decoder sub-units DEC (214) and encoder sub-units ENC (218). These DEC and ENC sub-units perform the respective decoder and encoder functions of the sub-units 114 and  
15 118 shown in FIGURE 2.

A timing unit (TU) supplies synchronization and timing signals for all of the hardware units in BTS 200. A main processor (MP) manages the resource allocation for all of the hardware units in the BTS.

For downlink data flow through BTS 200, user data is input from the  
20 transmission line interface towards the Radio Network Controller (RNC) and coupled through the exchange terminal (ET) ATM to an AAL2 link termination (ALT) and on to a service multiplexer (SMX). The data is then passed by the SMX to an ATM interface host (ATM-IFH) sub-unit 228 and on to an ATM interface client (ATM-IFC) sub-unit 230. The data is then coupled to the ENC sub-unit 218, where the data is  
25 channel coded and interleaved. The channel coded data is then coupled to the BBTX sub-unit, where the data is multiplied with a user-specific short code. The user-specific (spread) data are added sector-wise and multiplied with a sector/frequency-specific long code. The encoded signal is then coupled through the transceiver digital part 226, the transceiver RF part 224, and the MCPA to the transmit antenna.

30 For uplink data flow through BTS 200, the incoming signal from the receive antenna is coupled through the low noise amplifier 222, the transceiver RF part 224, and the transceiver digital part 226 to the BBIF sub-unit. The BBIF forms a part of

-13-

interface A<sub>1</sub> in FIGURE 2. The incoming signal is coupled to the BBRX sub-unit, which separates the modulation information in the incoming signal into user-specific channels by multiplying the incoming signal by user-specific short and long codes. The BBRX sub-unit also demodulates the incoming signal and detects the data from the resulting demodulated signal. The data is then coupled to the DEC sub-unit 214, which deinterleaves the incoming data and performs channel coding. The decoded data are then coupled by the ATM-IFC 234 to the ATM-IFH 232. The data are then coupled to the ALT, where the SMX couples the data to the ET and out over the transmission line interface towards the RNC for display.

FIGURES 4A and 4B are diagrams that illustrate the flexible allocation of signal processing resources utilizing the interface A<sub>1</sub>, shown in FIGURE 2, in accordance with the preferred embodiment of the present invention. As shown in the detailed block diagram of an RF/sector resource sub-unit 202 in FIGURE 5, from each RF/sector resource TRX-DIG 226 (1-N) in FIGURE 4A, there is a high speed serial connection 227 (1-N) to a baseband interface sub-unit BBIF. The high speed connection 227 and BBIF are both parts of the interface A<sub>1</sub>. This BBIF transfers the serial connections into one high speed parallel bus 229 that carries information from all sectors (1-N).

Within the baseband receiver unit 212, there is a plurality of hardware BBRX sub-units, as shown by the detailed block diagram of FIGURE 6. Each such BBRX sub-unit includes a plurality of BBRX signal processing resources. By a plurality of selectors on the input of each BBRX resource, one of these plurality of resources can access I and Q information from any combination of the carrier, sector, and diversity antenna signals. During a "softer" handover operation, one BBRX resource processes information from one carrier signal, but from different sectors or antennas. The I and Q information contains modulation information from many radio paths, with different multipath delays, entering a sector/antenna. The BBRX signal processing resource can dynamically choose any of the paths from any sector, and simultaneously process these paths. FIGURE 4B illustrates how the I and Q information from different sectors, carriers and antennas are mapped onto the parallel bus 229 by the BBIF sub-unit.

FIGURES 7A and 7B are diagrams that illustrate the flexible allocation of

-14-

signal processing resources utilizing the interface  $B'_1$  shown in FIGURE 2, in accordance with the preferred embodiment of the present invention. As shown in FIGURE 7A, from each BBRX sub-unit in receiver unit 212, there is a serial bus connection 231 ( $1-M_3$ ) to each DEC hardware sub-unit 214 that carries I and Q soft information data from all physical channel/BBRX resources within a BBRX hardware sub-unit. Each BBRX resource occupies one physical channel-slot on the bus 231. This time-slot can carry three different symbol rates (e.g., 32, 64 and 128 ksps). For symbol rates of 256, 512 or 1024 ksps, two, four or eight consecutive time-slots are used. As shown by FIGURE 7B, this bus structure facilitates the extraction of data by a physical channel selector in the DEC resource shown in the detailed block diagram of FIGURE 8. Each DEC resource within the DEC hardware sub-unit 214 can access all of the physical channel slots on all of the serial buses 231 ( $1-M_3$ ) shown in FIGURE 7A.

FIGURES 9A and 9B are diagrams that illustrate the flexible allocation of signal processing resources utilizing the interfaces  $B'_2$  and  $A'_2$  shown in FIGURE 2, in accordance with the preferred embodiment of the present invention. FIGURE 9A shows that each ENC resource (as shown in the detailed block diagram of FIGURE 10) in the ENC hardware sub-unit 218 can map its information on a time-slotted serial bus ( $B'_2$ ). For this embodiment, there are two parallel buses for I and Q information, respectively. During time T (FIGURE 9B), each ENC resource can map a plurality of consecutive symbols onto the bus  $B'_2$ . For the example shown in FIGURE 9B, the number of consecutive symbols is 1, 2, 4 and 8 for symbol rates of 32, 64, 128 and 256 ksps, for different ENC resources (such as the one in the detailed block diagram in FIGURE 10). The order in which the different symbol rates are allocated is determined by the resource allocations from the main processor shown in FIGURE 3.

Each BBTX sub-unit (216) hardware resource, as shown in FIGURE 11, can access any ENC resource (FIGURE 10) mapped onto the bus  $B'_2$ . During a "softer" handover operation, information from one ENC resource (FIGURE 10) can be mapped to BBTX resources on different BBTX hardware sub-units, thus resources can be utilized on different sectors but for the same carrier.

In FIGURE 9A, the BBTX hardware sub-unit (216) has a separate pool of BBTX resources for each carrier. For this embodiment, these resources are combined



-15-

into an I and Q information/carrier. Within the BBTX sub-unit (216), the information from different carriers are then multiplexed (MUX) into the data bus A<sub>2</sub> that can provide point-to-point connection with corresponding RF/sector resources, such as the RF/sector resource (TX) shown in the detailed block diagram of FIGURE 12. For this

5 embodiment, there are N such connections.

Although a preferred embodiment of the method and apparatus of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as

10 set forth and defined by the following claims.

-16-

## WHAT IS CLAIMED IS:

1. A base station for a mobile communications system, comprising:  
an RF signal processing unit;  
a baseband signal processing unit; and  
5 a first signal interface coupled between said RF signal processing unit and said baseband signal processing unit, for sector-wise allocating signals coupled between said RF signal processing unit and said baseband signal processing unit.
2. A base station for a mobile communications system, comprising:  
an RF signal processing unit;  
10 a baseband signal processing unit; and  
a first signal interface coupled between said RF signal processing unit and said baseband signal processing unit, for freely allocating sector resources of said RF signal processing unit to any resource of said baseband signal processing unit.
3. The base station of Claim 1, said baseband signal processing unit  
15 further comprising a second signal interface for freely allocating resources for radio transmission services between sectors.
4. The base station of Claim 3, wherein a softer handover is being performed on a downlink.
5. The base station of Claim 2, said baseband signal processing unit  
20 further comprising a second signal interface for freely allocating resources for radio transmission services between sectors.
6. The base station of Claim 2, wherein a softer handover is being performed on an uplink.
7. The base station of Claim 1 or 2, wherein said mobile communications  
25 system comprises a W-CDMA system.

-17-

8. The base station of Claim 1 or 2, wherein said mobile communications system comprises a CDMA system.

9. The base station of Claim 1 or 2, wherein said mobile communications system comprises a TDMA system.

5 10. The base station of Claim 1 or 2, wherein said RF signal processing unit comprises a plurality of RF signal processing sub-units, with each sub-unit of said plurality of RF signal processing sub-units corresponding to a respective sector.

10 11. The base station of Claim 1 or 2, wherein said baseband signal processing unit includes a plurality of signal processing transmitter sub-units, with each sub-unit of said plurality of signal processing transmitter sub-units corresponding to a respective sector.

12. The base station of Claim 1, wherein said baseband signal processing unit includes a first plurality of coder sub-units and a second plurality of transmitter sub-units.

15 13. The base station of Claim 2, wherein said baseband signal processing unit includes a first plurality of decoder sub-units and a second plurality of receiver sub-units.

14. A method for flexibly allocating signal processing resources in a base station of a mobile communications system, comprising the steps of:

20 allocating at least one of a plurality of first signal processing resources for uplink signal processing; and

said at least one of a plurality of first signal processing resources allocated for said uplink signal processing receiving signals from any RF sector of a plurality of RF sectors.

25 15. A method for flexibly allocating signal processing resources in a base

-18-

station of a mobile communications system, comprising the steps of:

allocating at least one of a plurality of second signal processing resources for downlink signal processing; and

5       said at least one of a plurality of second signal processing resources allocated for said downlink signal processing sending signals to any RF sector of a plurality of RF sectors.

16.     The method of Claim 15, said at least one of a plurality of second signal processing resources simultaneously sending signals to any RF sector of a plurality of RF sectors.

10       17.     The method of Claim 16, wherein a softer handover is being performed.

18.     The method of Claim 14, wherein said at least one of a plurality of first signal processing resources allocated for said uplink signal processing comprises a baseband receiver channel resource.

15       19.     The method of Claim 14 or 15, wherein said plurality of RF sectors comprises a plurality of RF sub-units.

20.     The method of Claim 14, wherein said at least one of a plurality of first signal processing resources allocated for said uplink signal processing comprises a decoder sub-unit.

20       21.     The method of Claim 15, wherein said at least one of a plurality of second signal processing resources allocated for said downlink signal processing comprises an encoder sub-unit.

22.     The method of Claim 14, wherein said at least one of a plurality of first signal processing resources allocated for said uplink signal processing comprises a receiver sub-unit.

-19-

23. The method of Claim 15, wherein said at least one of a plurality of second signal processing resources allocated for said downlink signal processing comprises a transmitter sub-unit.

5 24. The method of Claim 14 or 15, wherein said mobile communications system comprises a W-CDMA system.

25. The method of Claim 14 or 15, wherein said mobile communications system comprises a CDMA system.

26. The method of Claim 14 or 15, wherein said mobile communications system comprises a TDMA system.

10 27. The method of Claim 14, said at least one of a plurality of first signal processing resources simultaneously receiving signals from any RF sector of a plurality of RF sectors.

28. The method of Claim 27, wherein a softer handover is being performed.

1/9

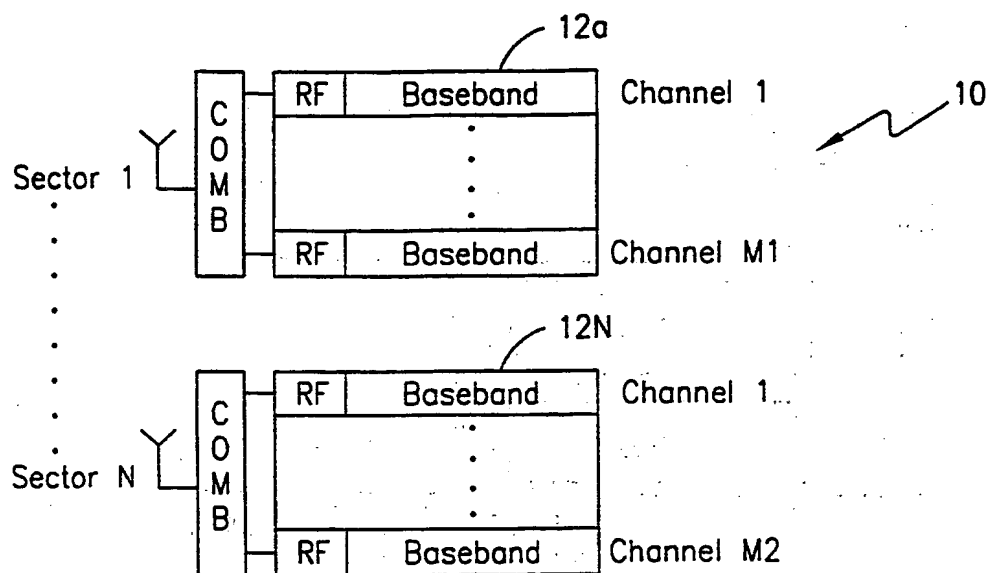


FIG. 1

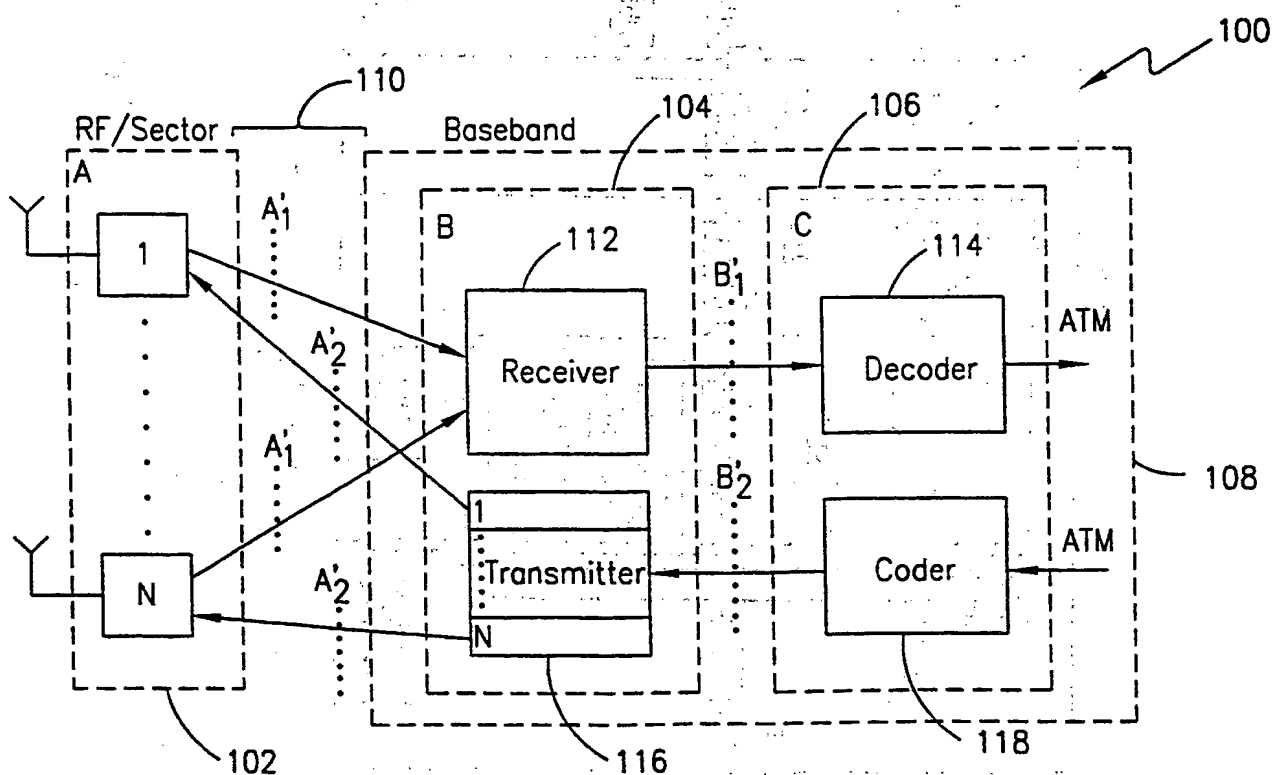


FIG. 2


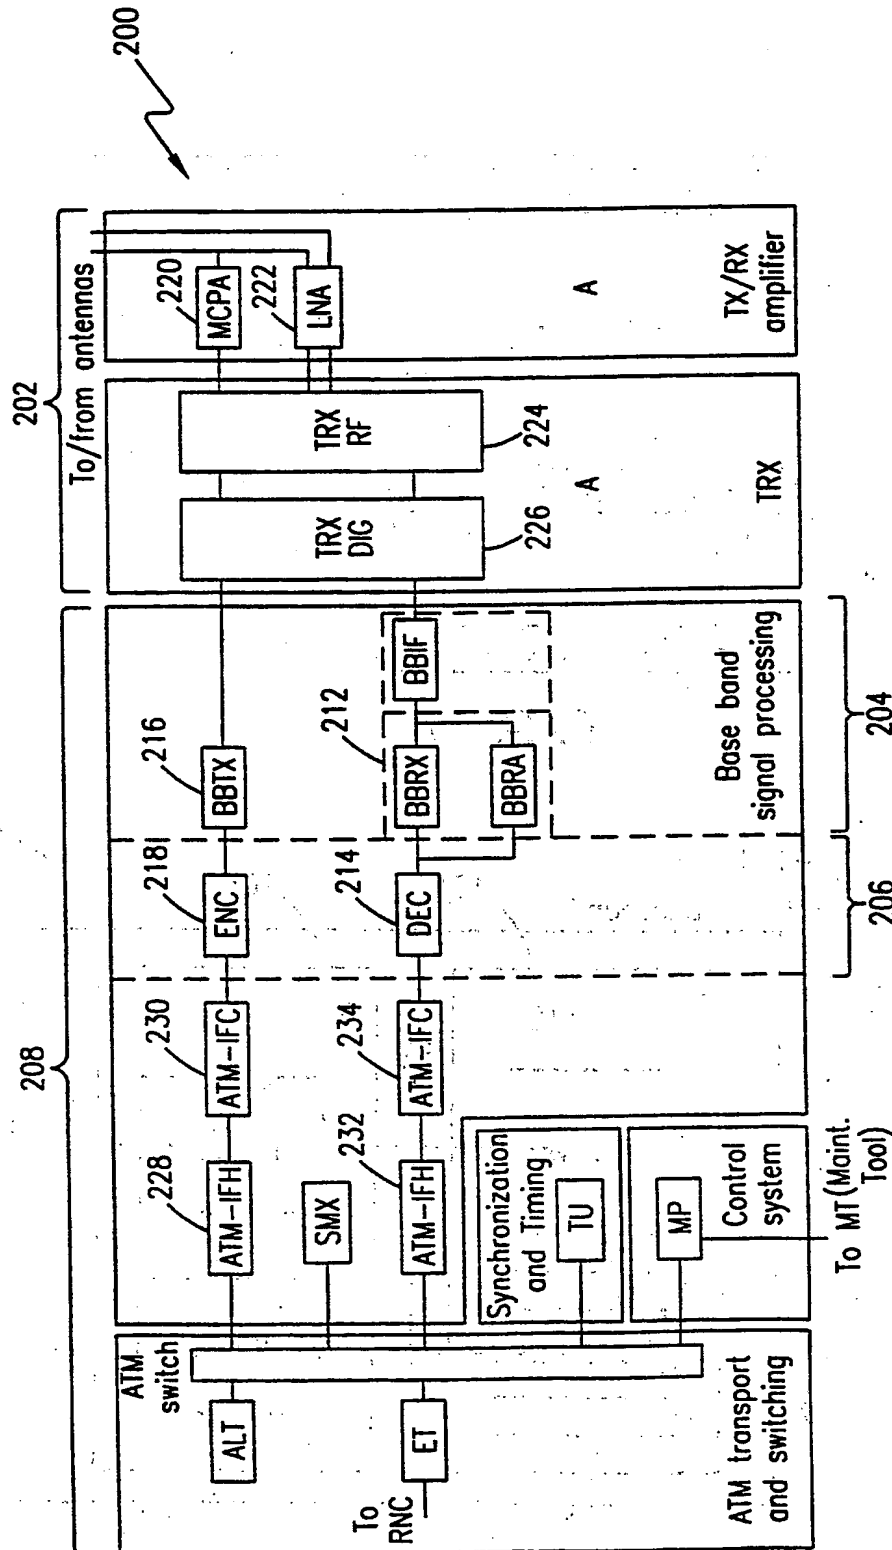




FIG. 3



202

FIG. 5

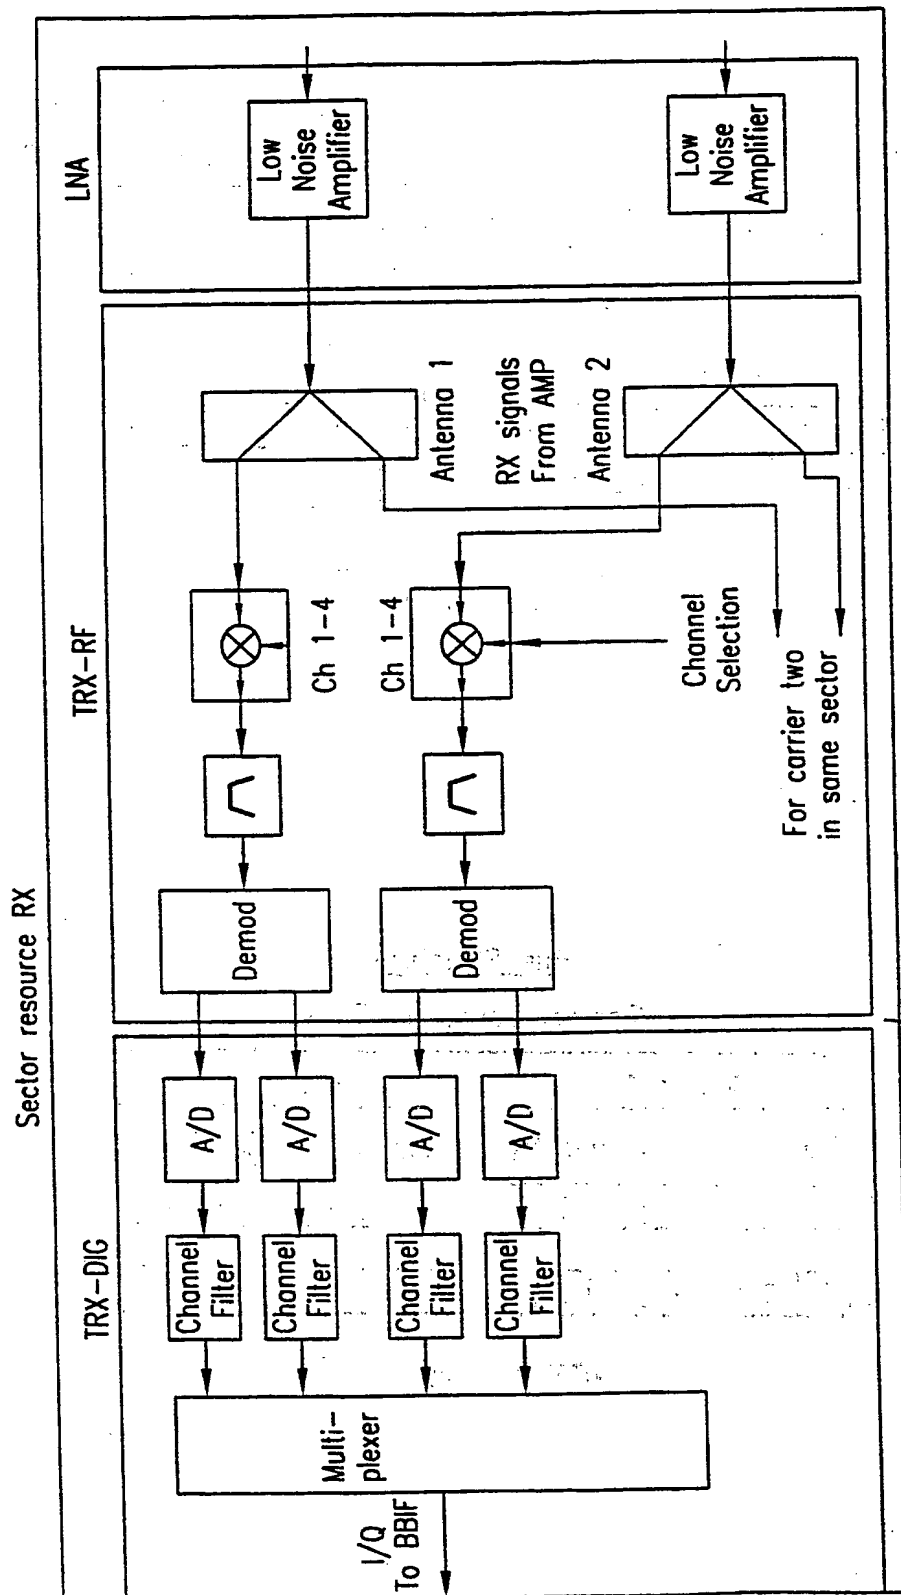

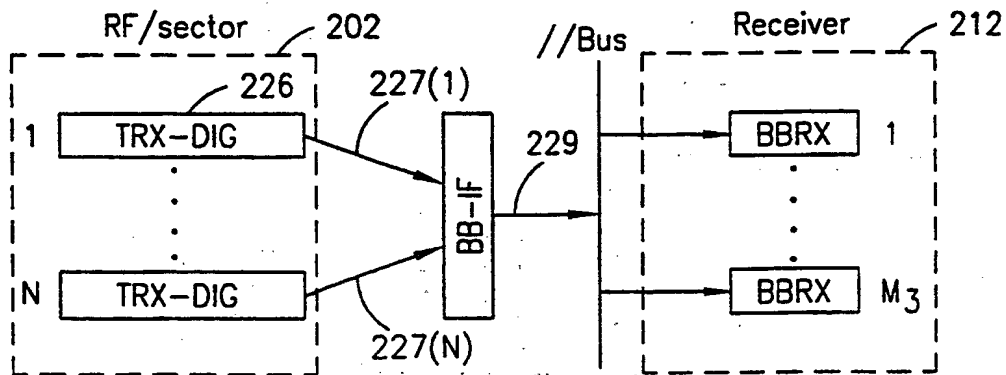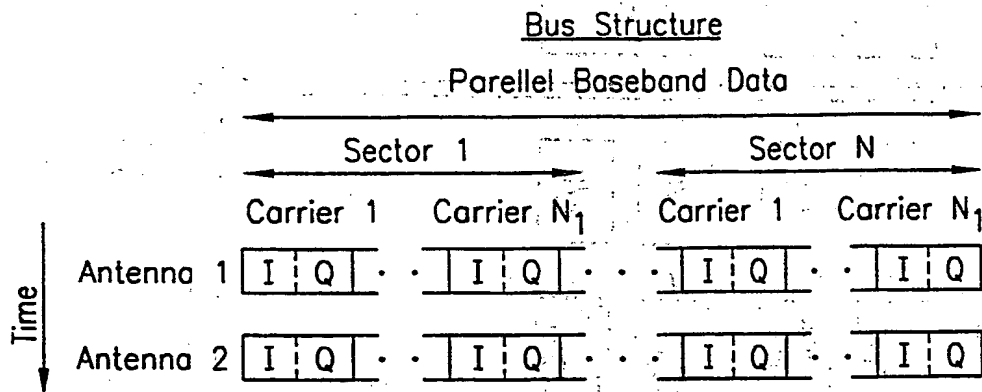Interface A:**FIG. 4A****FIG. 4B**

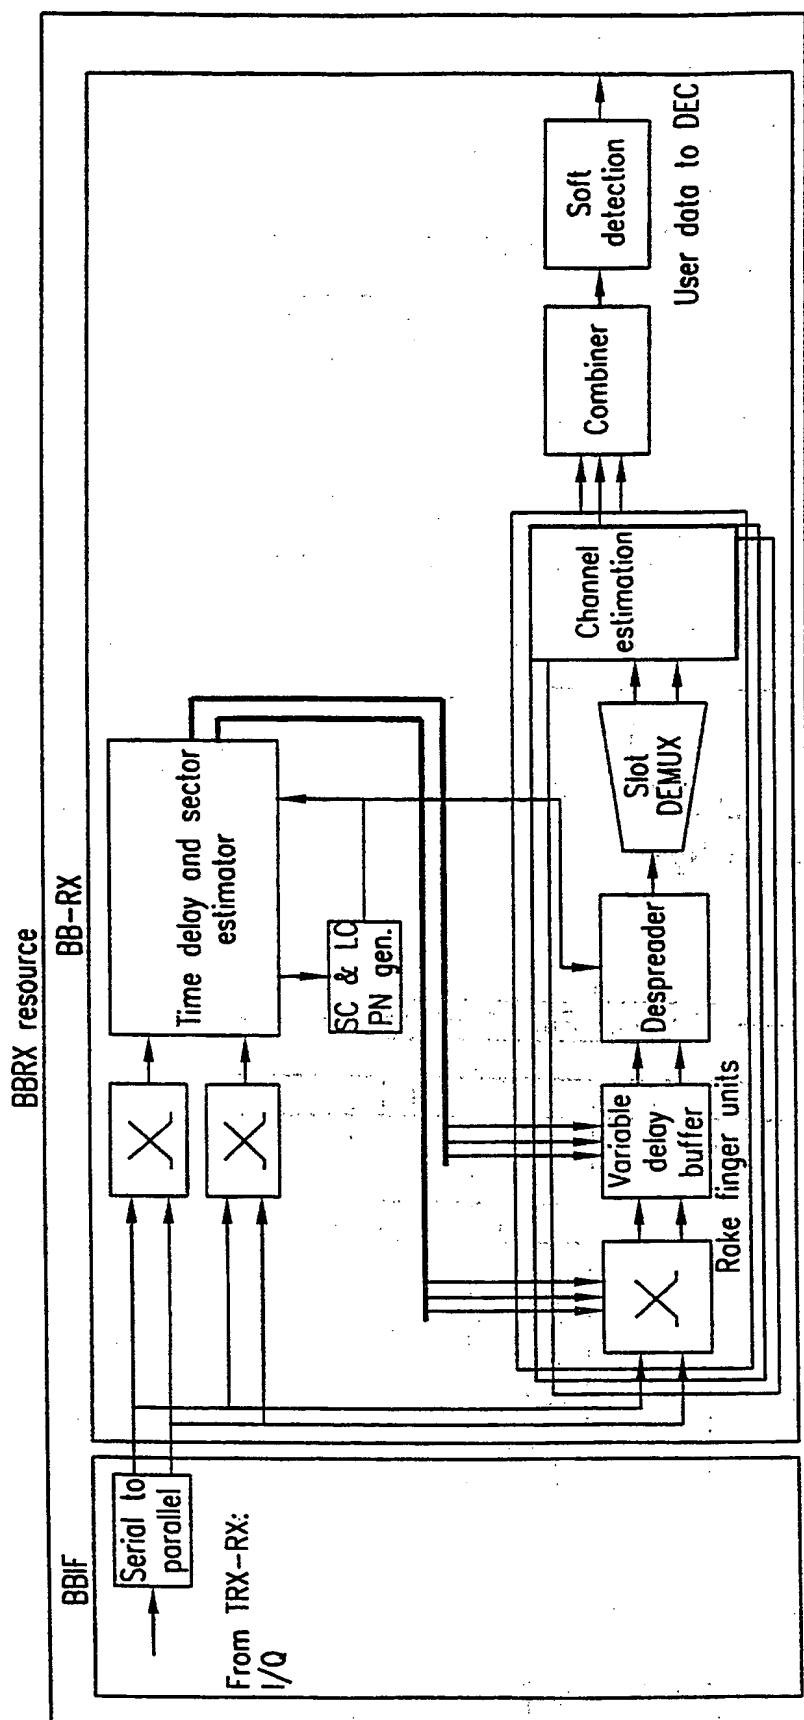


FIG. 6

212

214

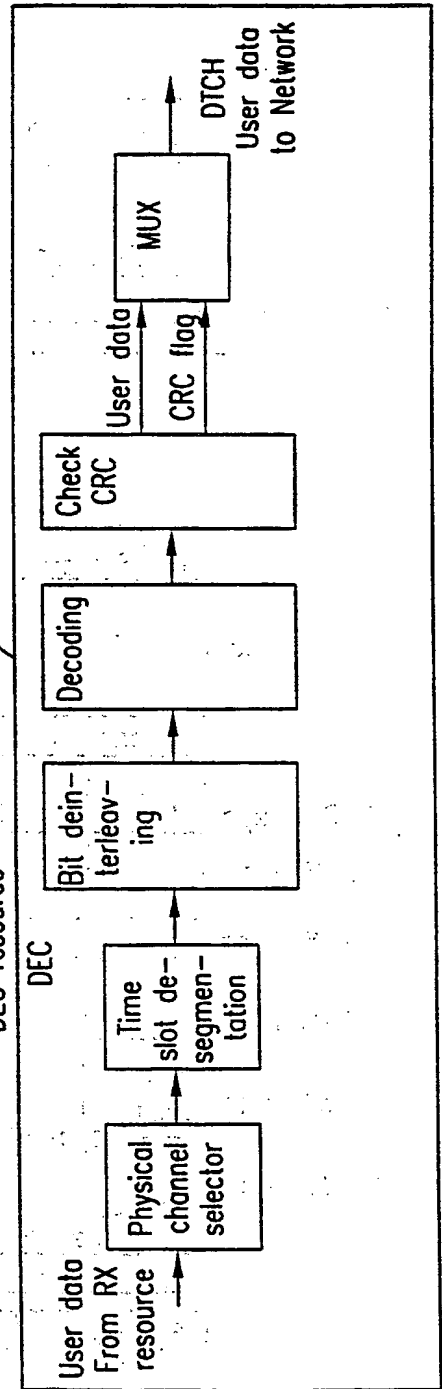
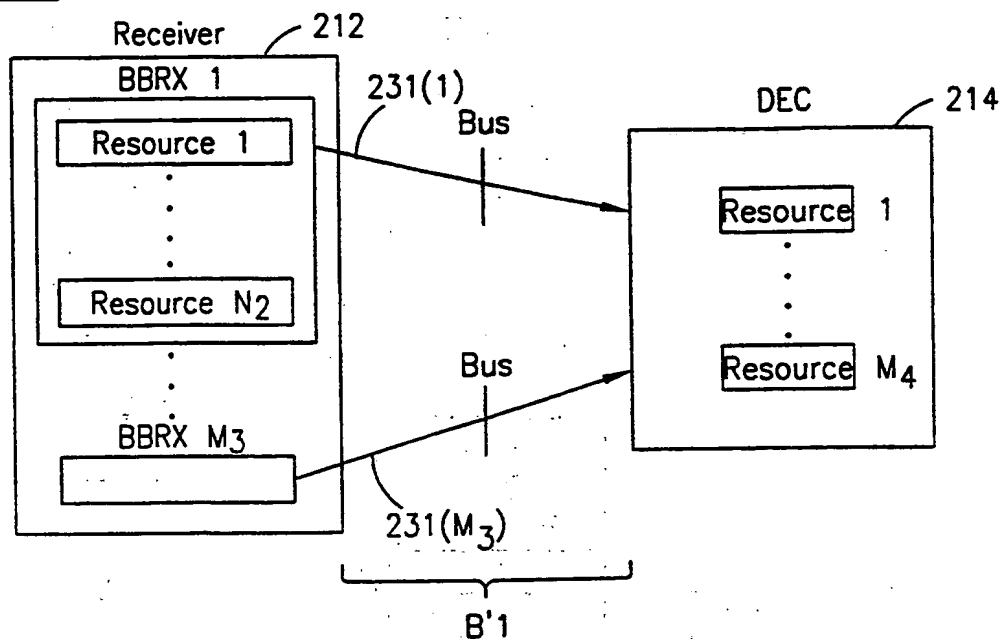
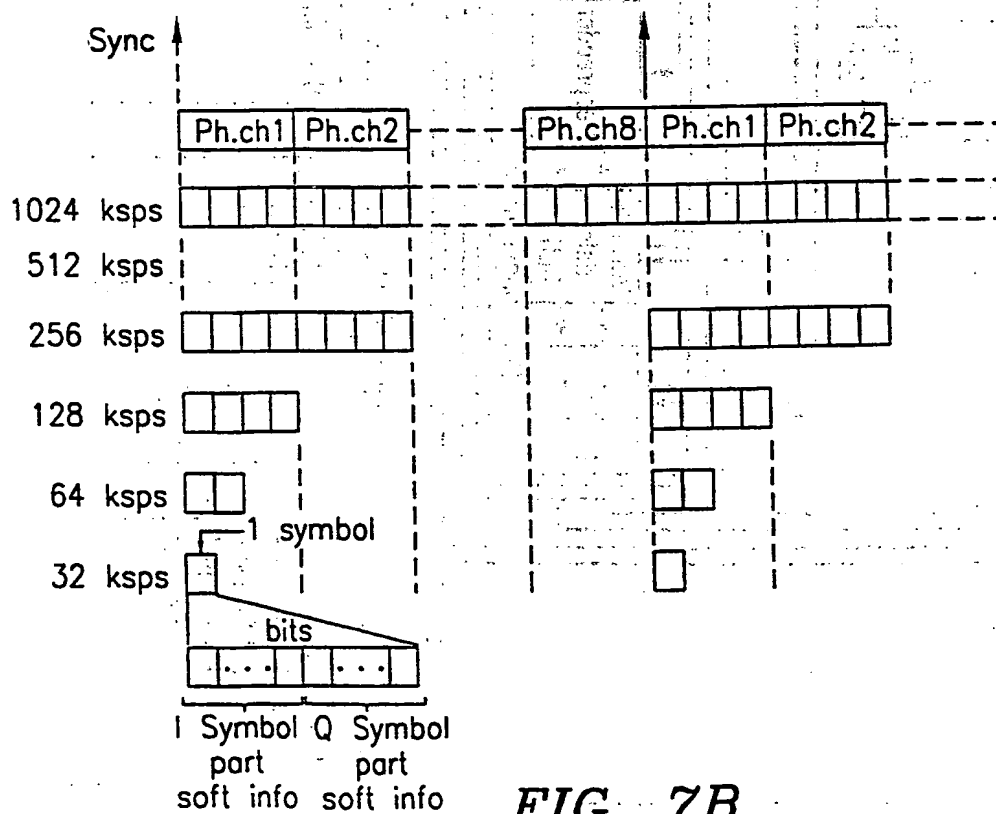


FIG. 8

6/9

Interface B'1**FIG. 7A**Bus-Structure (example  $N_2=8$ )**FIG. 7B**

7/9

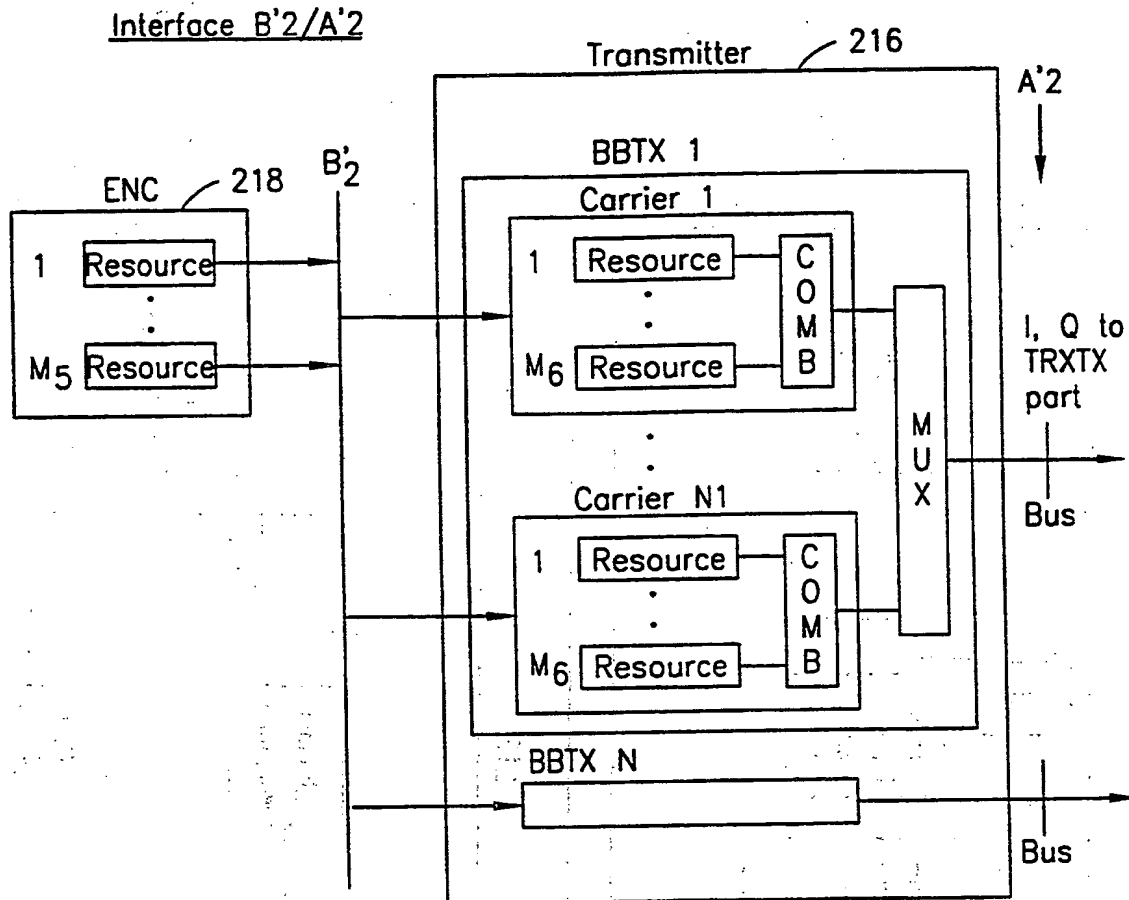


FIG. 9A

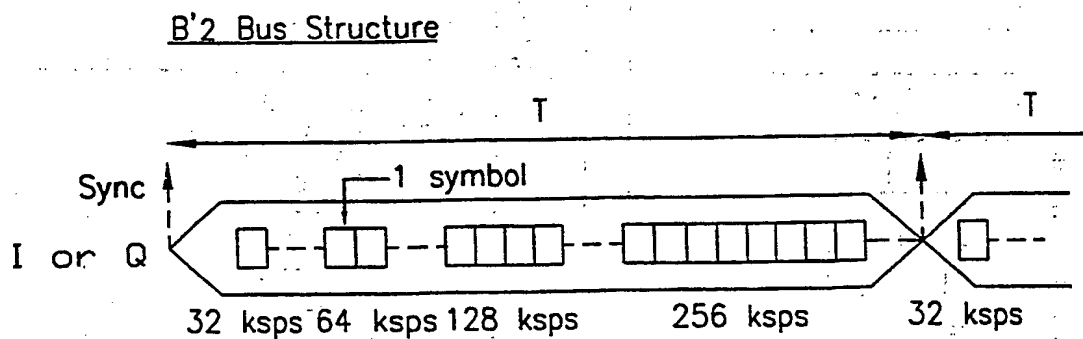


FIG. 9B

FIG. 10

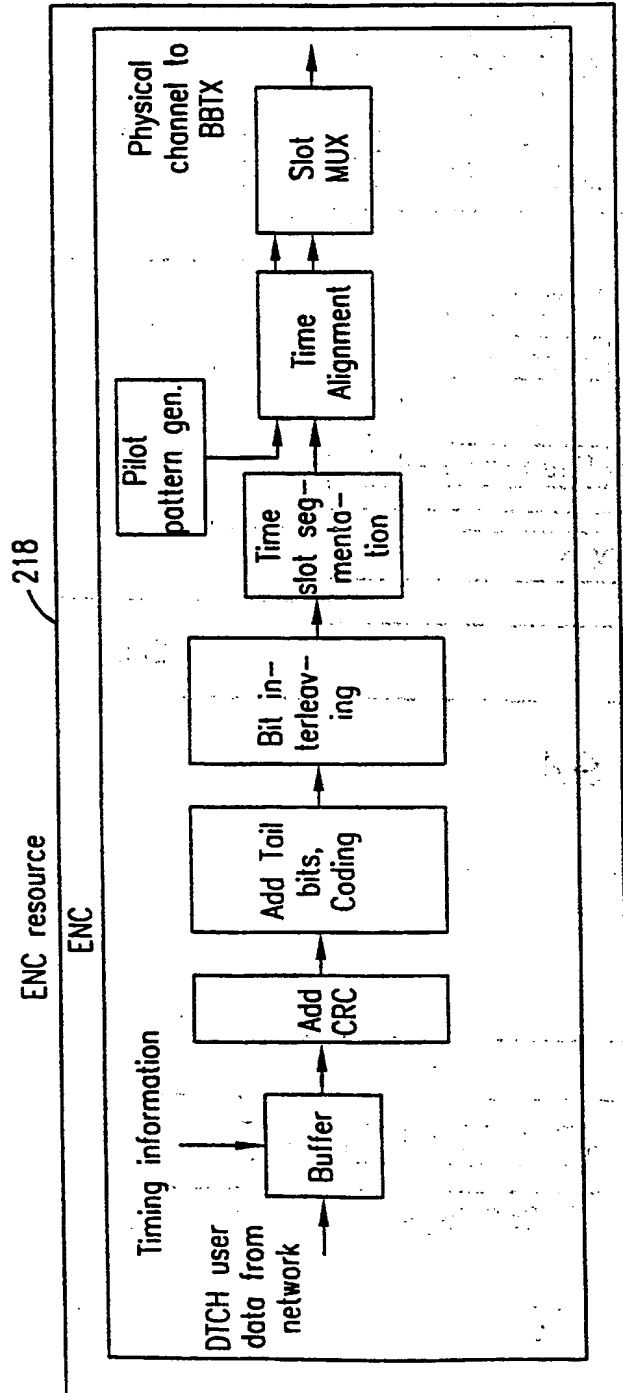
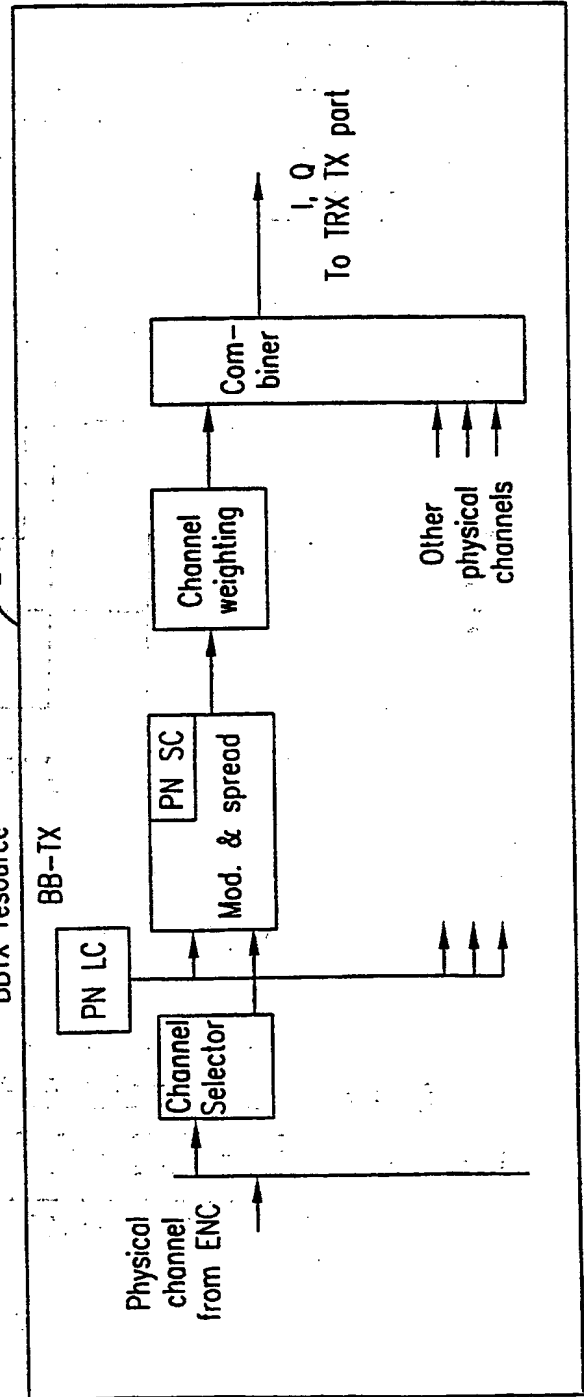


FIG. 11



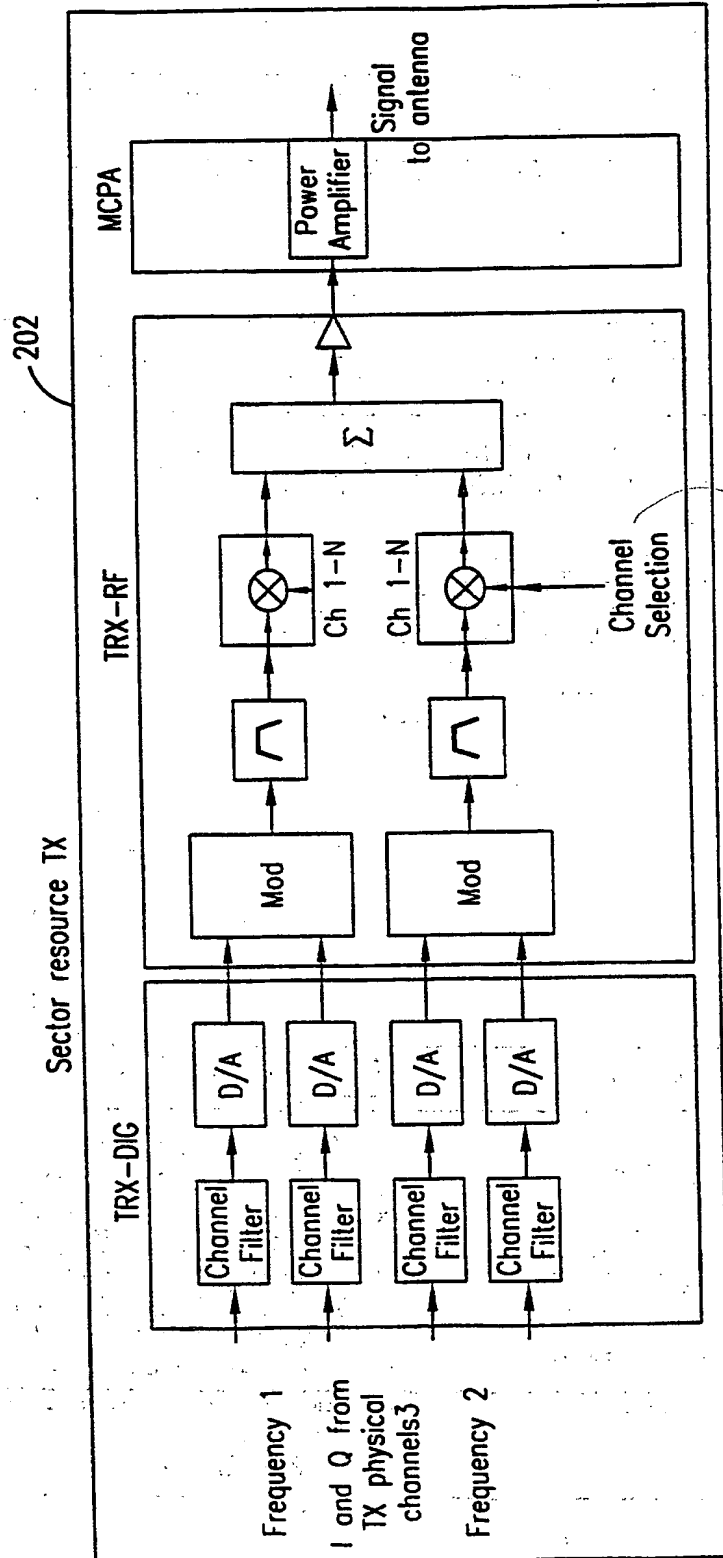


FIG. 12

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/01805

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
----------	--	-----------------------

P, X	WO 98 13956 A (HORIKAWA IZUMI ; YAMADA DAISUKE (JP); MATSUSHITA ELECTRIC IND CO LT) 2 April 1998  & EP 0 869 629 A7 October 1998 see column 6, line 44 - column 7, line 41 see column 8, line 39 - column 10, line 5; figure 1  6119004	1-3, 5, 8, 10, 11, 14-16, 18-21, 25
------	--	--

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

18 December 1998

Date of mailing of the international search report

28/12/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schut, G

# INTERNATIONAL SEARCH REPORT

TOITAM

Inter national Application No  
PCT/SE 98/01805

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 29608 A (QUALCOMM INC) 14 August 1997 5867763	1-6, 8, 10, 14-19, 22, 23, 25, 27, 28
Y	see page 7, line 25 - page 8, line 16  see page 28, line 9 - page 30, line 15 see page 35, line 21 - page 37, line 10; figures 8, 10, 12	7, 12, 13, 20, 21, 24
X	WO 97 32406 A (NOKIA TELECOMMUNICATIONS OY ;JAENTTI ARTO (FI); PELTOLA JUKKA (FI)) 4 September 1997 6317423	1, 2, 9-11, 14, 15, 19, 22, 23, 26
Y	see page 3, line 18 - page 5, line 3 see page 6, line 7 - line 20; figures 1, 2  WO 96 38015 A (NOKIA TELECOMMUNICATIONS OY ;KESKITALO ILKKA (FI); MUSZYNSKI PETER) 28 November 1996 5893033 see page 11, line 11 - line 18 see page 35, line 30 - page 42, line 29; figures 11, 12	7, 12, 13, 20, 21, 24
A	WO 95 33350 A (AIRNET COMMUNICATIONS CORP) 7 December 1995	



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/01805

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9813956 A	02-04-1998	AU 4320797 A CA 2238358 A EP 0869629 A	17-04-1998 02-04-1998 07-10-1998
WO 9729608 A	14-08-1997	AU 2117497 A EP 0879541 A FI 981719 A	28-08-1997 25-11-1998 08-10-1998
WO 9732406 A	04-09-1997	FI 960987 A AU 1882697 A EP 0878065 A	02-09-1997 16-09-1997 18-11-1998
WO 9638015 A	28-11-1996	FI 952529 A AU 5820796 A CN 1158208 A EP 0772950 A JP 10503911 T NO 970298 A	25-11-1996 11-12-1996 27-08-1997 14-05-1997 07-04-1998 20-03-1997
WO 9533350 A	07-12-1995	AU 1733295 A CA 2191721 A EP 0763309 A JP 10501382 T	21-12-1995 07-12-1995 19-03-1997 03-02-1998

**ORIGINAL  
NO MARGINALIA**